



डेडीकेटेड फ्रेट कोरीडोर

डेडीकेटेड फ्रेट कोरीडोर कार्पोरेशन ऑफ़ इंडिया लि.

(भारत सरकार का उपक्रम)

Dedicated Freight Corridor Corporation of India Ltd.

A Government of India (Ministry of Railways) Enterprise


No. HQ/EN/Track/RRM/CS/4/28550

Date: 27.10.2025

The CGMs
EDFC & WDFC

Sub: - Correction Slip No. 04 dt. 16.10.2025 to the DFC Railroad Manual 2024.

Competent Authority has decided that Correction/addition as indicated in the enclosed Correction Slip no. 04 dated 16.10.2025, to relevant para of DFC Railroad Manual-2024 be made.



(Arun Kumar Tiwari)
GGM/Tech

Copy to:


- (1) Dir/PP & Dir/Infra for kind information please.
- (2) ED/AM for kind information please.
- (3) GGM/Bridge for kind information please.
- (4) Principal/HHI for kind information please.

The existing Para 103: Cross section of Track: Fig. 1.1 and Fig.1.2 shall be replaced as under:

103(a): Single Line - Fig. 1.1

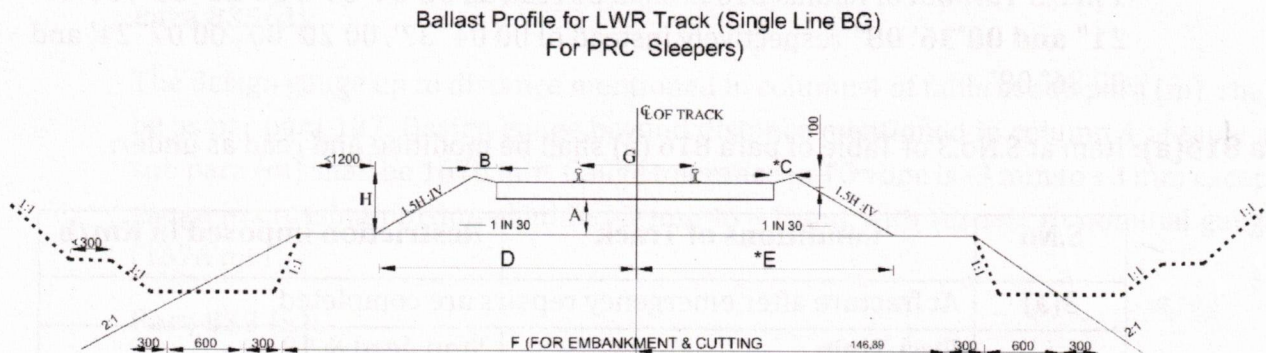

103(b): Double Line – Fig. 1.2

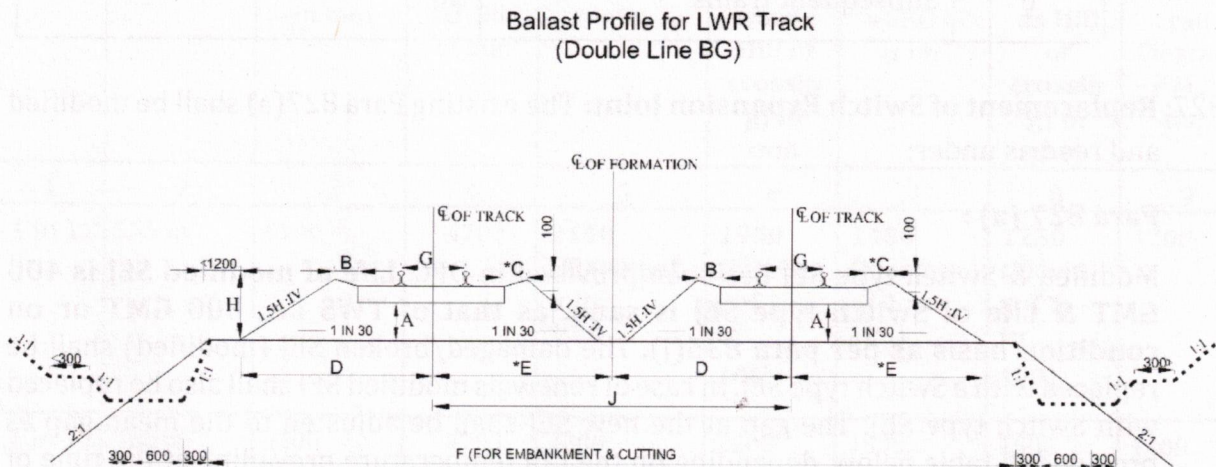

Para 110 : A new para no. 110 (d) shall be added as under:

Para 110 (d): **Modern Fastening:**

Approved Modern Fastenings can be used in place of ERC based fastenings in phased manner. These fastenings are capable of being supplied factory fitted on sleepers from the Concrete Sleeper Plants for laying in the field. The Modern Fastenings shall comply with the requirements of category 'C' fastening system as per EN 13481-1:2012 and EN 13481-2:2022.

AR

The existing Para 114: heading Fastenings on PSC sleepers shall be replaced and read as under:

Para 114: **Fastening on Rail or Rail Fastenings**

Para 114(d)- shall be deleted

Para 127: Key Parameters for Turnouts used in DFC:

Geometric values of various Turnouts

Switch Entry Angle for 1 in 12 Turnout of Radius 555 m, 460 m, 441.36 m and 1 in 8.5 Turnout of Radius 218 m shall be read as **00°04' 37", 00°20' 00", 00°07' 21" and 00°36' 08"** respectively instead of 00 04° 37', 00 20° 00', 00 07° 21' and 00 36° 08'.

Para 816(a): Item at S.No.3 of Table of para 816 (a) shall be modified and read as under:

S.No	Conditions of Track	Restriction imposed in Km/h
3(a)	At fracture after emergency repairs are completed	
i	First Train	Stop dead & 10
ii	Subsequent trains	20
3(b)	At fracture after emergency repairs are completed with approved high performance rail clamp and there is 24 hours watch	
i	First Train	Stop dead & 10
ii	Subsequent trains	50

Para 827: **Replacement of Switch Expansion Joint:** The existing Para 827(a) shall be modified and read as under:

Para 827 (a) :

Modified & Switch type SEJ has been provided in DFC. **Life of modified SEJ is 400 GMT & Life of Switch type SEJ is same as that of TWS i.e., 800 GMT or on condition basis as per para 835(j).** The damaged/broken SEJ (modified) shall be replaced with a Switch type SEJ. In case of renewals modified SEJ shall also be replaced with Switch type SEJ. The gap at the new SEJ shall be adjusted to the mean gap as provided in table below, depending on the rail temperature prevailing at the time of replacement.

Para 835: **Inspection of Points and crossings:** The existing Para 835 (b), 835 (c), 835 (d), 835 (l) and 835 (k) shall be modified and read as under:

Para 835 (b):

Gauge, Cross level, Versine (Only on T/O side) are to be measured at every 3 mtr interval from ATS (0 station) to back leg of crossing.

Para 835(c):

Track behind Crossing on turnout side: Track parameters (G, XL and Versines) to be measured up to next turnout / derailing switch / end of turn-in curve, as the case may be. In case no such track feature exists, measurement to be done up to 10 stations behind crossing. Stations to be marked at 3 m interval. Versines to be measured on 6 m chord. Station No. 0 to be marked at the centre of last long sleeper in case of PSC sleepers otherwise at heel of crossing.

Para 835(d):

The design gauge up to distance mentioned in column 4 of table at sub para (m), shall be as per para 127. Design gauge beyond distance mentioned in column 4 of table at sub para (m) shall be 1676 mm. Gauge tolerance in TO zone is -3 mm to +3 mm except gauge in crossing portion shall be -3 mm to +1 mm with respect to nominal gauge (1676 mm).

Para 835 (k):

Details of Check rail length and clearance of TO:

TO Angle	Switch Radius	Length of Check rail of ML side in mm	Length of Check rail of TO side in mm	Length on ML side X(Towards SRJ) in mm	Length on ML side X1(Towards Hill of crossing) in mm	Length on TO side Y (Towards SRJ) in mm	Length on TO side Y1 (Towards Hill of crossing) in mm	Length of uniform Check rail Clearance M in mm	Stretch of 44-48 MM uniform Clearance
1	2	3	4	5	6	7	8	9	10
1 in 12	555 m	6100	4700	2150 (Flaring of 1 in 100)	1950 (Flaring of 1 in 100)	1450 (Flaring of 1 in 100)	1250 (Flaring of 1 in 100)	1700	After SL No 70 to before SL No 75
1 in 12	460 m	6100	4700	2200 (Flaring of 1 in 100)	2200 (Flaring of 1 in 100)	1500 (Flaring of 1 in 100)	1500 (Flaring of 1 in 100)	1400	After SL No 62 to before SL No 65
1 in 12	441 m	4500	4500	1400	1400	1400	1400	1700	C/L of SL No 69 To C/L SL No 72
1 in 8.5	216 m	5800	4600	2200 (Flaring of 1 in 100)	2200 (Flaring of 1 in 100)	1600 (Flaring of 1 in 100)	1600 (Flaring of 1 in 100)	1100	Before SL No 43 to After SL No 44

83	66 mm to 44 mm clearance	44 mm uniform clearance	44 mm to 66 mm clearance	83
150 mm	Y	M	Y1	150 mm
On TO Side				

83	66 mm to 44 mm clearance	44 mm uniform clearance	44 mm to 66 mm clearance	83
150 mm	X	M	X1	150 mm
On Main Line Side				

Fig 8.7: Details of Check rail clearance for 1 in 12 with R = 555 and 460 m and 1 in 8.5 with 218 m

71 mm to 44 mm clearance	44 mm uniform clearance	44 mm to 71 mm clearance
Y/X	M	Y1/X1
On TO as well as ML side		

Fig 8.8: Details of Check rail clearance for 1 in 12 with R = 441

Para 835(I):

Distance from TNC to ANC for radius 218 shall be read as 77 mm instead of 71 mm.

Para 846: **Robotic Reconditioning of CMS Crossing:** The existing Para 846 shall be modified and read as under:

Para 846:

Robotic reconditioning of CMS Crossing: Robotic Welding Technology is to be used for in-situ reconditioning of Weldable CMS crossing on all running lines including loop lines. The Robotic Welding technique uses a computer-controlled arc-welder that utilizes a coated wire without gas to eliminate operator exposure to weld fumes. The records of all welding parameters and events are stored in memory for later reference. OEM shall guarantee minimum 80 GMT life after reconditioning. For detailed welding process the manufacturer's manual may be referred to. Reconditioning activity after three rounds of reconditioning shall be decided by CTE/DFCCIL. Selection of Points and Crossings for Reconditioning is as following:

- CMS crossings to be reconditioned by robotic welding should be in good condition

AP

and certified by the Sectional IMSD for their suitability for reconditioning and should normally not have exceeded specified limit of wear as given in para 835(j).

- b) Crossings containing cracks on the worn-out portion having depth more than 3 mm (as determined by gouging) beyond the condemning size shall not be selected for further reconditioning.
- c) The Crossings having internal defects should not be reconditioned.

-----*****-----

